

4 1/2" Hollow Carrier Perforating Gun


Description

Hollow Carrier Perforating Gun only is used in oil wells in preparation for production, containing several Shaped Charges to perforate. It can be conveyed using wire line, tubing or coiled tubing. Perforating guns are available in variety range of sizes and configurations. Other phasing, length and shot densities can be made based on customer request. Design is based on fast, safe and precise loading and offloading procedures.

Specification

Nominal Outer Diameter	4.5 in (112.9 mm)		
Pressure Rating	15,000 psi		
Temperature Rating	Depending on O-Ring		
Upper and Lower Connection	3 15/16" - 6Acme 2G		
Tensile Load	180,000 lbf		
Part Number	Depend On Specification		
Nominal Gun Length	6 ft. (1.8 m)	11 ft. (3.35 m)	21 ft. (6.4 m)
Interval missed between guns	16.8 in (426.6 mm)	16.8 in (426.6 mm)	16.8 in (426.6 mm)
Max. Magnitude of Burr and Swell (Based On 5 SPF, Phasing 60)	6.09 mm in ambient liquid		

Shot Configuration

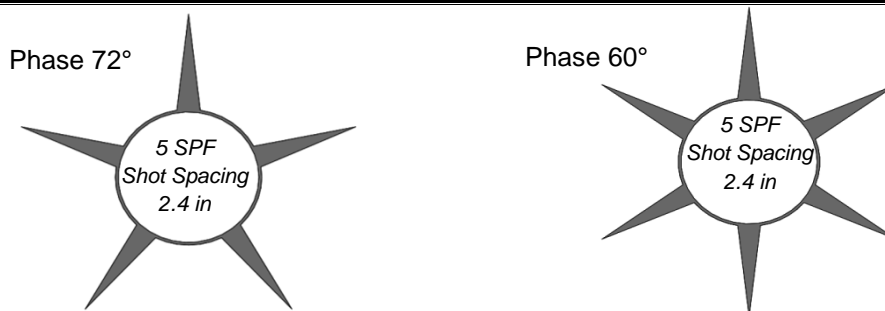

Packing Information

Package (pcs)	--
Package Type	Bundle

Note: Packing specification is set based on customer request

